

ASSEMBLY INSTRUCTIONS FOR #410-4/#410-5 ADJUSTABLE FEED/CREEP GUARD

PARTS LIST



1-#410-4 OR 1-#410-5 CREEP GUARD



4-5/16" X 3/4" BOLTS



4-5/16" LOCK NUTS

WASHERS


4-7/16" FLAT WASHERS
w/ 45 DEG. BEND

ASSEMBLY INSTRUCTIONS

1. Bow guard just enough so square clevis ends seat around 1/2" vertical pipe. Make sure guard is on the inside of the ewes pen.
2. Place guard approximately 8" from bottom of head opening.
3. Use (4) 5/16" x 3/4" bolts, (4) 7/16" bent washers, and (4) 5/16" lock nuts to secure the creep guard to the panel

Square Clevis

1/2" Vertical pipe

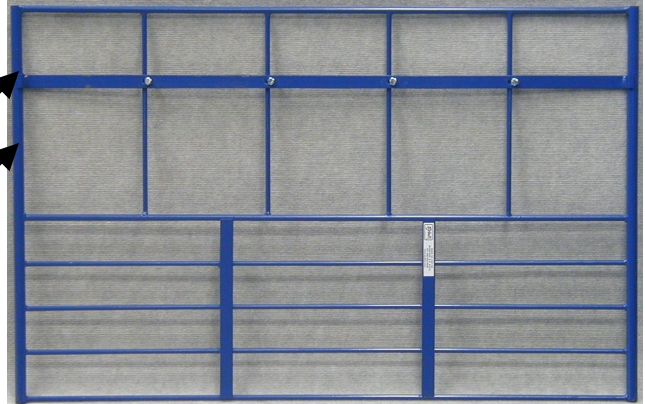

SYDELL INC.

46935 SD HWY 50
BURBANK, SD 57010
(605) 624-4538

Website: www.sydell.com

Email: sydell@sydell.com